



5200 Beethoven Street, Los Angeles, CA 90066
 TEL: (310)306-5556 • FAX: (310)821-7413
 WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5228
80 - 1000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

Solid State Broadband High Power RF Amplifier

The 5228 is a very high power broadband amplifier that covers the 80 – 1000 MHz frequency range. This amplifier utilizes Class A linear power devices that provide an excellent 3rd order intercept point, high gain, a wide dynamic range, and an industry leading P1dB performance.

Due to robust engineering and employment of the most advanced devices and components, this amplifier achieves high efficiency operation with proven reliability. Like all OPHIR_{RF} amplifiers, the 5228 comes with an extended multiyear warranty backed by Ophir RF's commitment to total customer satisfaction.

| | <u>Parameter</u> | <u>Specification @ 25° C</u> |
|-----------------------------|------------------------|---|
| <u>Electrical</u> | | |
| 1 | Frequency Range | 80 – 1000 MHz |
| 2 | Power at PSAT | 1200 Watts min to 500 MHz 1000 Watts min 500-1000 MHz |
| 3 | Power at P1dB | 1000 Watts min to 500 MHz 700 Watts min 500-1000 MHz |
| 4 | Small Signal Gain | +63 dB Minimum |
| 5 | Gain Flatness | ± 5.0 dB Maximum |
| 6 | IP ₃ | +64 dBm typical |
| 7 | Input VSWR | 2:1 max |
| 8 | Harmonics | -20 dBc min @ P1dB Compression |
| 9 | Spurious Signals | < -60 dBc typical @ P1dB Compression |
| 10 | Input/Output Impedance | 50 Ohms nominal |
| 11 | AC Input Power | 10,000 Watts Maximum 12,000 KVA Maximum |
| 12 | AC Input | 208 VAC, three phase 3Ø |
| 13 | RF Input | 0 dBm max |
| 14 | RF Input Signal Format | CW/AM/FM/PM/Pulse |
| 15 | Class of Operation | Class A |
| <u>Mechanical</u> | | |
| 16 | Dimensions | 31" x 24" x 26"(H x W x D) 79 x 61 x 67 (H x W x D) cm |
| 17 | Weight | 339 lbs / 154 Kg |
| 18 | RF Connectors | Type-N Female Input Type 7/16 Female Output |
| 19 | Grounding | Chassis |
| 20 | Cooling | Internal Forced Air |
| <u>Environmental</u> | | |
| 21 | Operating Temperature | 0° C to +50° C |
| 22 | Operating Humidity | 95% Non-condensing |
| 23 | Operating Altitude | Up to 10,000' Above Sea Level |
| 24 | Shock and Vibration | Normal Truck Transport |

Specifications subject to change without notice

0318 Approved By: _____ Date: _____



5200 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5228

80 - 1000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

FRONT PANEL CONTROLLER FEATURES (*Optional*)

- ◇ - Forward Power Monitoring
- ◇ - Reflected Power Monitoring
- ◇ - Gain Control (20 dB dynamic range of adjustment)
- ◇ - Fault Status
- ◇ - Full Protection Of any VSWR Condition, Open or Short, into any Phase Angle
- ◇ - Remote Control Access via the Ethernet, RS-232, or IEEE-488 Communications ports
- ◇ - Integrated Automatic Leveling Control to allow end-user to maintain output even with variances in temperature, or input RF level
- ◇ - Standby/Enable Control
- ◇ - Front Panel Display for easy viewing of System Status Locally
- ◇ - Keypad buttons for full local control

CIRCUIT PROTECTIONS

- ◇ - Thermal Overload
- ◇ - Over Current
- ◇ - Over Voltage
- ◇ - Open or Short VSWR Conditions (*With Front Panel Controller*)

CIRCUIT CONTROL (*WITH FRONT PANEL CONTROLLER*)

- ◇ - Standby (amplifier disable)
- ◇ - Gain/power setting with 20dB range
- ◇ - VSWR protection Reset
- ◇ - ALC On/ Off

CIRCUIT INDICATIONS (*WITH FRONT PANEL CONTROLLER*)

- ◇ - Forward Power
- ◇ - Reflected power
- ◇ - VSWR Fault
- ◇ - Temp Fault
- ◇ - Gain Setting (VVA) percentage


RFPA SYSTEM OPTIONS

- ◇ - Switched Filter Bank
- ◇ - Input Power Requirements
- ◇ - Ruggedized Version
- ◇ - Cabinet Requirements
- ◇ - Outdoor Version
- ◇ - Sample Ports
- ◇ - Racking Options
- ◇ - Many More!
- ◇ - **Consult Factory with Specific Requirements**



5200 Beethoven Street, Los Angeles, CA 90066
TEL: (310)306-5556 • FAX: (310)821-7413
WEB: www.ophirrf.com • E-MAIL: sales@ophirrf.com

MODEL 5228
80 - 1000 MHz
1000 WATTS
LINEAR POWER RF AMPLIFIER

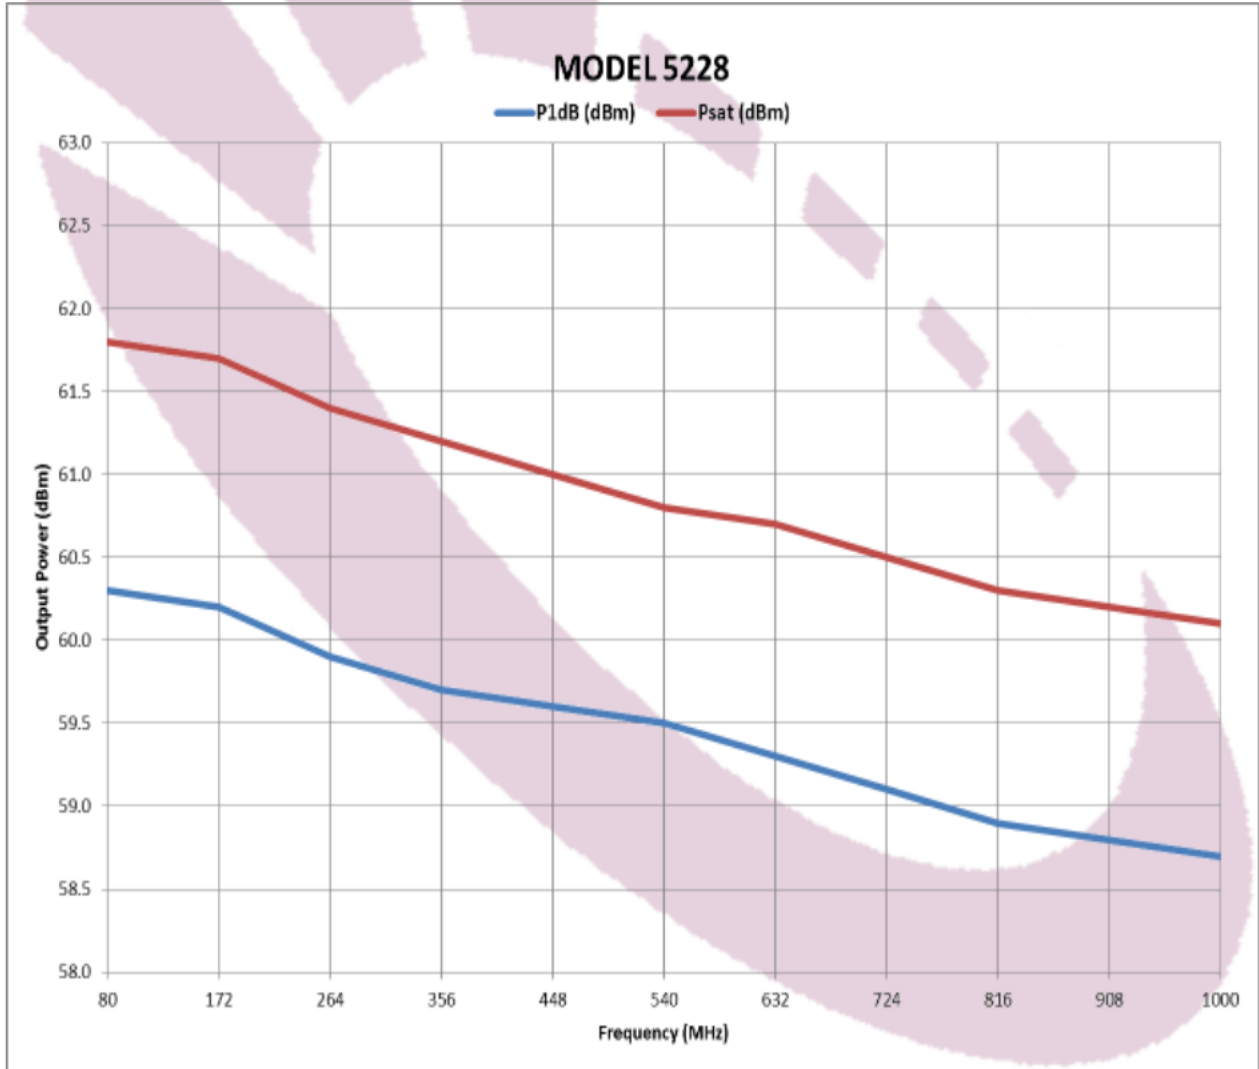

ORDERING MODELS

- RE - Rear RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232
- FE - Front RF Connector model with Front Panel Controller Ethernet, IEEE-488 and RS232